STAINLESS STEEL FOOD SERVICE EQUIPMENT

SINKS • DISHTABLES • WORKTABLES • POTRACKS • SHELVING •



MOP SINKS
 HAND SINKS
 ENCLOSED CABINETS



WORKTABLES

All worktable tops to be 16 gauge Type 304 stainless steel. Edges will be turned down 2" welded and polished to a #3 or #4 finish. Gussets are closed type, welded to underside of top hat channeling. Legs are 1 5/8" OD tubular stainless steel. Feet will be adjustable sanitary bullet type.

WORKTABLES WITH CROSSBRACING

To be Streivor Stainless series TSX, a flat top worktable with crossbracing. Crossbracing will be the same material as and welded securely to legs.

STANDARD FEATURES:

- · Top to be 16 gauge
- · Legs and crossbracing 1 5/8" tubular 16 gauge
- · All materials type 304 stainless steel
- · Left side turned down 2"
- · Right side turned down 2"
- Flat Edge
- · Stainless Steel Bullet Foot

OPTIONAL FEATURES:

- · Top to be 14 gauge
- · Left side 6" high splash
- · Right side 6" high splash
- · Marine edge
- · Stainless steel bullet foot with 3 1/2" mounting flange
- · 5" casters with brake
- · Sound deadner



TSX-3624	36"	24"
TSX-3630	36*	30*
TSX-4824	48*	24"
TSX-4830	48"	30°
TSX-6024	60*	24"
TSX-6030	60°	30*
TSX-7224	72*	24"
TSX-7230	72"	30"
TSX-8424	84"	24°
TSX-8430	84"	30°
TSX-9624	96*	24"
TSX-9630	96*	30"
TSX-10824	108*	24"
TSX-10830	108"	30"
TSX-12024	120"	24"
TSX-12030	120"	30"
ALIGNE TALL IS		

WORKTABLES WITH UNDERSHELF


To be Streivor Stainless series TSS, a flat top worktable with undershelf. Undershelf will be 18 gauge, the same material as and welded securely to legs.

STANDARD FEATURES:

- · Top to be 16 gauge
- · Legs 1 5/8" tubular 16 gauge
- · All materials type 304 stainless steel
- · Left side turned down 2"
- · Right side turned down 2"
- · Flat Edge
- · Stainless Steel Bullet Foot

OPTIONAL FEATURES:

- · Top to be 14 gauge
- · Left side 6" high splash
- · Right side 6" high splash
- · Marine edge
- · Stainless steel bullet foot with 3 1/2" mounting flange
- · 5" casters with brake
- · Sound deadner



TSS-3624	36*	24"
TSS-3630	36*	30°
TSS-4824	48*	24"
TSS-4830	48"	30°
TSS-6024	60°	24"
TSS-6030	60°	30"
TSS-7224	72*	24"
TSS-7230	72*	30"
TSS-8424	84*	24"
TSS-8430	84*	30"
TSS-9624	96*	24*
TSS-9630	96*	30"
TSS-10824	108*	24"
TSS-10830	108"	30"
TSS-12024	120"	24"
TSS-12030	120°	30"

WORKTABLES WITH BACKSPLASH AND CROSSBRACING


To be Streivor Stainless series TBSX, a flat top worktable with backsplash and crossbracing. The backsplash will be 6" high with a 1" return to the wall at 45° and a 1" horizontal. Crossbracing will be the same material as and welded securely to legs.

STANDARD FEATURES:

- · Top to be 16 gauge
- · Legs and crossbracing 1 5/8" tubular 16 gauge
- · All materials type 304 stainless steel
- · Left side turned down 2"
- · Right side turned down 2"
- · Flat Edge
- · Stainless Steel Bullet Foot

OPTIONAL FEATURES:

- · Top to be 14 gauge
- · Left side 6" high splash
- · Right side 6" high splash
- · Marine edge
- · Stainless steel bullet foot with 3 1/2" mounting flange
- · 5" casters with brake
- Sound deadner



STAINLESS STEEL CROSS BRACING	L	W
TBSX-3624	36"	24
TBSX-3630	36"	30
TBSX-4824	48"	24
TBSX-4830	48°	30
TBSX-6024	60°	24
TBSX-6030	60"	30
TBSX-7224	72"	24
TBSX-7230	72"	30
TBSX-8424	84"	24
TBSX-8430	84"	30
TBSX-9624	96"	24
TBSX-9630	96"	30
TBSX-10824	108*	24
TBSX-10830	108"	30
TBSX-12024	120"	24
TBSX-12030	120°	30

WORKTABLES WITH BACKSPLASH AND UNDERSHELF


To be Streivor Stainless series TBSS, a flat top worktable with backsplash and undershelf. The backsplash will be 6" high with a 1" return to the wall at 45° and a 1" horizontal. Undershelf will be 18 gauge, the same material as and welded securely to legs. Feet will be adjustable sanitary bullet type.

STANDARD FEATURES:

- · Top to be 16 gauge
- · Legs 1 5/8" tubular 16 gauge
- · All materials type 304 stainless steel
- Left side turned down 2"
- · Right side turned down 2"
- · Flat Edge
- · Stainless Steel Bullet Foot

OPTIONAL FEATURES:

- · Top to be 14 gauge
- · Left side 6" high splash
- · Right side 6" high splash
- · Marine edge
- · Stainless steel bullet foot with 3 1/2" mounting flange
- · 5" casters with brake
- · Sound deadner



ı	w			
36"	24"			
36"	30°			
48"	24"			
48"	30°			
60"	24"			
60"	30"			
72"	24"			
72°	30°			
84*	24"			
84"	30°			
96*	24"			
96*	30*			
108"	24"			
108°	30*			
120"	24"			
120"	30*			
	36" 36" 48" 48" 60" 60" 72" 72" 84" 84" 96" 108" 108"			

SHELVES

SINGLE TIER TABLE SHELVES

 To be Streivor Stainless TS-1, a single tier table mounted shelf, constructed of 16 gauge type 304 series stainless steel. Edges will be turned down 1 1/2" welded and polished to a #3 or #4 finish. Shelf will be 18" above work surface and be supported by 1" OD tubular stainless steel welded to underside of the shelf and secured to mounting brackets.

STANDARD FEATURES:

- · Top to be 16 gauge
- · Mounting pads

OPTIONAL FEATURES:

- Top to be 14 gauge
- Wedge Lock Fastener
- 16 gauge Hat Channel
- · Sound Deadner

DOUBLE TIER TABLE SHELVES



To be Streivor Stainless TS-2, a double tier table mounted shelf, constructed of 16 gauge type 304 series stainless steel. Edges will be turned down 1 1/2" welded and polished to a #3 or #4 finish. Bottom shelf will be 18" above work surface, and top shelf will be 12" above bottom shelf. Shelves are supporeted by 1" OD tubular stainless steel welded to underside of shelves and secured to mounting brackets.


STANDARD FEATURES:

- · Top to be 16 gauge
- Mounting pads

OPTIONAL FEATURES:

- Top to be 14 gauge
- Wedge Lock Fastener
 16 gauge Hat Channels
- Sound Deadner

WALL SHELVES SIDES TURNED DOWN

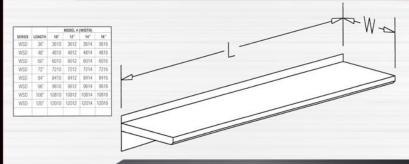

To be Streivor Stainless model WSD, a wall shelf constructed of 16 gauge type 304 series stainless steel. Back edge will be turned 1 1/2". Side and front edges will be turned down 1 1/2" welded and polished to a #3 or #4 finish. Support brackets will be supplied on 6 ft. maximum centers.


STANDARD FEATURES:

- · Shelf to be 16 gauge
- · 16 gauge support bracket
- · Back turned up 2"
- · Front turned down 2"
- · Left and right turned down 2"

OPTIONAL FEATURES:

- Top to be 14 gauge
- 14 gauge support bracket

WALL SHELVES SIDES TURNED UP

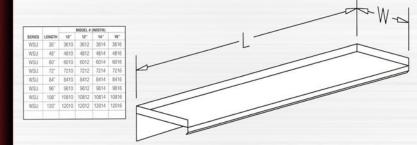

To be Streivor Stainless model WSU, a wall shelf constructed of 16 gauge type 304 series stainless steel. Back and side edges will be turned up 1 1/2" welded and polished to a #3 or #4 finish. Front edge will be turned down 1 1/2". Support brackets will be supplied on 6 ft. maximum centers.

STANDARD FEATURES:


- · Shelf to be 16 gauge
- · 16 gauge support bracket
- Back turned up 2"
- Back turned up 2"
 Front turned down 2"
- · Left and right turned up 2"

OPTIONAL FEATURES:

- · Top to be 14 gauge
- 14 gauge support bracket


SLIDE DRAWER

ROLLER DRAWER



SD = Slide Draws G = Galvanized Ster S = Stainless Ster

	MODEL	DIMENSIONS		
	NUMBER	L	W	
	SDG-1520	15	20	
	SDG-2020	20	20	
er	SDS-1520	15	20	
el	SDS-2020	20	20	



	MODEL	DIMENSIONS	
	NUMBER	L	W
	RDG-P-1520	18	24
	RDG-P-2020	23	24
	RDS-P-1520	18	24
	RDS-P-2020	23	24
3	RDS-S-1520	18	24
	pnc.c.anan	22	24

RD = Roller Drawer
G = Galvanized Steel
S = Stainless Steel
-P- = Plastic Drawer Insert


POTRACKS

SINGLE BAR POTRACK

To be Streivor Stainless SPR, a wall mounted single bar potrack constructed of Type 304 series stainless steel, with sliding stainless steel double prong pot hooks spaced one each per linear foot of hanger bar. Support brackets will be supplied on 6 foot maximum centers.


STANDARD FEATURES:

- · Support brackets 12 gauge
- · Hanger bar 1/4" x 2" tubing
- · 1 hook per 12"



OPTIONAL FEATURES:

- Support brackets 1/4" x 2" flat bar
- · Hanger bar 1/4" x 2" flat bar
- · 2 hooks per 12"
- · 3 hooks per 12"




LENGTH
36"
48"
60"
72"
84"
96"
108"
120"

DOUBLE BAR POTRACK

To be Streivor Stainless DPR, a wall mounted double bar potrack constructed of Type 304 series stainless steel, with sliding stainless steel double prong pot hooks spaced two each per linear foot of hanger bar. Support brackets will be supplied on 6 foot maximum centers.


STANDARD FEATURES:

- · Support brackets 12 gauge
- · Hanger bar 1/4" x 2" tubing
- 1 hook per 12"



OPTIONAL FEATURES:

- · Support brackets 1/4" x 2" flat bar
- · Hanger bar 1/4" x 2" flat bar
- · 4 hooks per 12"
- 6 hooks per 12"



MODEL NUMBER	LENGTH
DPR-36	36"
DPR-48	48"
DPR-60	60"
DPR-72	72"
DPR-84	84"
DPR-96	96"
DPR-108	108"
DPR-120	120"

WALL SHELF WITH SINGLE BAR POTRACK


To be Streivor Stainless WSDSPR, a wall shelf single bar potrack constructed of Type 304 series stainless steel, with sliding stainless steel double prong pot hooks spaced one each per linear foot of hanger bar. Support brackets will be supplied on 6 foot maximum centers.

STANDARD FEATURES:

- · Support brackets 12 gauge
- · Hanger bar 1/4" x 2" tubing
- 1 hook per 12"
- · Shelf to be 16 Gauge Stainless Steel
- · Left and right end turned down 2"

OPTIONAL FEATURES:


- · Support brackets 1/4" x 2" flat bar
- · Hangar bar 1/4" x 2" flat bar
- 2 Hooks per 12"
- · 3 Hooks per 12"
- · Shelf to be 14 Gauge Stainless Steel
- · Left and right end turned up 2"

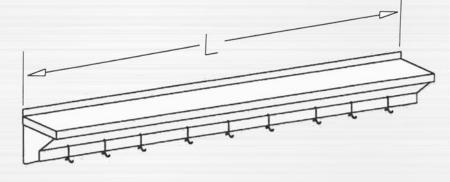

Model	
WSDSPR-36	
WSDSPR-48	
WSDSPR-60	
WSDSPR-72	
WSDSPR-84	
WSDSPR-96	
WSDSPR-108	
WSDSPR-120	

DISHTABLES

SOILED DISHTABLES

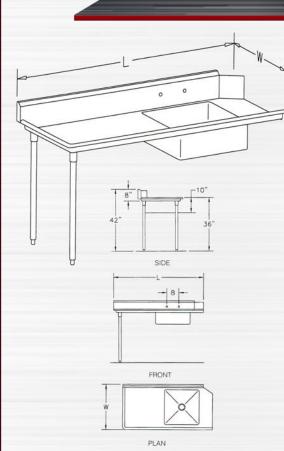

SIDE

FRONT

PLAN

To be Streivor Stainless SDT, a soiled dishtable fabricated from 16 gauge Type 304 series stainless steel. All welded to form a one piece sanitary unit. Polished to a #3 or #4 finish, and meets or exceeds NSF requirements. The backsplash will be 8" high with a 1" return at 45° to the wall and a 1" horizontal. The front and one end will have a 1 1/2" sanitary roll. The end nearest the dishmachine will have a 3/4" turn down into the dishmachine. The prerinse tub will be 8" deep and is furnished with a 3 1/2" center drain opening. Closed type leg gussets are welded to the underside of the dishtable. Legs are 1 5/8" OD tubular stainless steel with adjustable sanitary thermoplastic bullet feet.

STANDARD FEATURES:

- · Top and Tub to be 16 Gauge
- · Legs and Bracing to be 1 5/8" tubular 16 Gauge
- · All Materials to be Type 304 Stainless Steel
- · Sink Tub(s) 20"x 20"x8" Deep
- · Right end turn down 1"
- · Left end rolled edge
- Backsplash 8" high
- ·Cross Bracing Front to Back
- · Stainless steel bullet feet
- · 3.5" embossed drain opening centered in tub

	DIME	SHIPPING	
MODEL NUMBER	L	W	WEIGHT
SDT-36-(TO)*	36"	30"	60 LB.
SDT-48-(TO)*	48"	30"	70 LB.
SDT-60-(T0)*	60"	30"	80 LB.
SDT-72-(T0)*	72"	30"	90 LB.
SDT-84-(T0)*	84"	30"	100 LB.
SDT-96-(TO)*	96"	30"	110 LB.
		100000	100000000000000000000000000000000000000

OPTIONAL FEATURES:

- · Top and Tub to be 14 Gauge
- · Legs and Bracing to be 1 5/8" tubular 16 Gauge
- · All Materials to be Type 304 Stainless Steel
- Sink Tub(s) 20"x20"x12" Deep
- · Left end splash to match backsplash
- · crossbracing front to back and left to right
- undershelf
- · Stainless steel bullet feet with 3.5" pad
- · Disposal collar weld
- Disposal cone weld
- · Switch bracket
- · Quick drain
- · Sound deadener

Model shown: SDT-5-(L TO R) (left to right). Indicate L TO R or R TO L for left to right or right to left operation.

CLEAN DISHTABLES

To be Streivor Stainless CDT, a clean dishtable fabricated from 16 gauge Type 304 series stainless steel. All welded to form a one piece sanitary unit. Polished to a #3 or #4 finish, and meets or exceeds NSF requirements. The backsplash will be 8" high with a 1" return at 45° to the wall and a 1" horizontal. The front and one end will have a 11/2" sanitary toll. The end nearest the dishmachine will have a 3/4" turn down into the dishmachine. Closed type leg gussets are welded to the underside of the dishtable. Legs are 15/8" OD tubular stainless steel with adjustable sanitary thermoplastic bullet feet.



- · Top and Tub to be 16 Gauge
- Legs and Bracing to be 1 5/8" tubular 16 Gauge
- · All Materials to be Type 304 Stainless Steel
- Right End Turn Down 1"
- Left End Rolled Edge
- Backsplash 8" High
- · Cross Bracing Front to Back
- Stainless Steel Bullet Foot

OPTIONAL FEATURES:

- · Top and Tub to be 14 Gauge
- · Legs and Bracing to be 1 5/8" tubular 16 Gauge
- Left End Splash to Match Back Splash
- · Backsplash 12" High
- · Cross Bracing Front to back and Left to Right
- Under Shelf
- · Stainless Steel Bullet foot with 3.5" Pad
- Sound deadener



	DIMEN	SHIPPING	
MODEL NUMBER	L	W	WEIGHT
CDT-36-(TO)*	36"	30"	40 LB.
CDT-48-(TO)*	48"	30"	50 LB.
CDT-60-(TO)*	60"	30"	60 LB.
CDT-72-(T0)*	72"	30"	70 LB.
CDT-84-(TO)*	84"	30"	80 LB.
CDT-96-(TO)*	96"	30"	90 LB.

Model shown: CDT-5-(L TO R) (left to right). Indicate L TO R or R TO L for left to right or right to left operation.




NSF SINKS

All Streivor Stainless NSF Sinks will be fabricated from 16 gauge Type 304 stainless steel. All welded to form a one piece sanitary unit. Polished to a #3 or #4 finish and meet or exceed NSF requirements.

SCULLERY SINKS: 1, 2, AND 3 COMPARTMENTS

The backsplash will be 8" high with a 1" return to the wall at 45° and a 1" horizontal. The front and both ends will have a 1 1/2" diameter sanitary roll. Sink tubs will be 12" deep and are furnished with a 3 1/2" center drain opening. Closed type leg gussets are welded to the bottom of the sink. Legs are 1 5/8" OD tubular stainless steel with adjustable sanitary thermoplastic bullet feet.



STANDARD FEATURES:

- All materials to be Type 304 Stainless Steel
- · Top and tub to be 16 gauge
- · Legs and bracing to be 1 5/8" tubular 16 gauge
- · Sink tub(s) 12" deep
- · Backsplash 8" high
- · Right end rolled edge 2.25" high
- · Left end rolled edge 2.25" high
- · Crossbracing front and back
- · Stainless Steel bullet feet
- 3 1/2" embossed drain opening centered in tub (no drain fitting)

OPTIONAL FEATURES:

- · Top and tub to be 14 gauge
- · Legs and bracing to be 1 5/8" tubular 14 gauge
- · Sink tub(s) 14" deep
- · Backsplash 12" high
- · Right end splash to match backsplash
- Left end splash to match backsplash
- Crossbracing front to back & left to right
- · Stainless Steel bullet feet with 3 1/2" mounting flange
- Lever Waste
- · Lever Waste with overflow
- · Sound deadner

SINK & DRAINBOARD OPTIONS



Model	Tub Size	Drainboard	ard Dimensions		Shipping	
	I.D.	Size	L	W	Weight	
1NSF17	17°X17°	0	22"	22 1/2"	50 lb.	
1NSF1723	17"X23"	0	22*	28 1/2"	55 lb.	
1NSF23	23"X23"	0	28"	28 1/2"	60 lb.	
1NSF2923	29°X23°	0	34"	28 1/2"	65 lb.	
1NSF29	29"X29"	0	34"	34 1/2"	70 lb.	



	1.0.	Size	L	W	Weight
1NSF17-()*D18	17"X17"	18"	37 1/2"	22 1/2*	55 lb.
1NSF17-()*D24	17"X17"	24"	43 1/2"	22 1/2"	60 lb.
1NSF1723-()*D18	17"X23"	18"	37 1/2"	28 1/2°	70 lb.
1NSF1723-()*D24	17"X23"	24"	43 1/2"	28 1/2"	75 lb.
1NSF23-()*D24	23"X23"	24"	49 1/2"	28 1/2°	80 lb.
1NSF23-()*D30	23"X23"	30"	55 1/2"	28 1/2°	85 lb.



Model	Tub Size	Drainboard	Dime	ensions	Shipping
	1.0.	Size	L	W	Weight
2NSF17	17°X17°	0	41*	22 1/2"	60 lb.
2NSF1723	17°X23°	0	41"	28 1/2"	70 lb.
2NSF23	23"X23"	0	53"	28 1/2"	75 lb.
2NSF2923	29"X23"	0	65"	28 1/2"	90 lb.
2NSF29	29"X29"	0	65"	34 1/2"	100 lb.



	I.D.	Size	L	W	Weight
2NSF17-()*D18	17"X17"	18"	56 1/2"	22 1/2"	80 lb.
2NSF17-()*D24	17"X17"	24"	62 1/2"	22 1/2"	85 lb.
2NSF1723-()*D18	17"X23"	18"	56 1/2"	28 1/2"	95 lb.
2NSF1723-()*D24	17"X23"	24"	62 1/2"	28 1/2"	100 lb.
2NSF23-()*24	23"X23"	24"	74 1/2"	28 1/2"	110 lb.
2NSF23-()*30	23°X23°	30"	80 1/2"	28 1/2°	115 lb.

17"X23"

23"X23"

29"X23"

Dimensions L W 60° 22 1/2

96" 28 1/2"

96" 34 1/2"

28 1/2"

90 lb

100 lb.

140 lb.

150 lb.

110 lb. 115 lb. 125 lb. 130 lb. 150 lb. 155 lb.



1						
WITH LEFT DRAINBOARD	Model	Tub Size	Drainboard	Dimer	nsions	Ī
THE ELFT BRAINBOARD		I.D.	Size	L	W	ľ
	3NSF17-()*D18	17°X17°	18°	75 1/2"	22 1/2"	Ī
	3NSF17-()*D24	17°X17°	24"	81 1/2"	22 1/2*	Γ
	3NSF1723-()*D18	17"X23"	18"	75 1/2"	28 1/2"	Γ
	3NSF1723-()*D24	17"X23"	24"	81 1/2"	28 1/2"	Γ
	3NSF23-()*D24	23°X23°	24"	99 1/2"	28 1/2"	Γ
N N	3NSF23-()*D30	23°X23°	30°	105 1/2"	28 1/2"	Γ
						г

NSF2323



I.D.	Size	L	W	Weight	
17"X17"	18"	37 1/2"	22 1/2"	55 lb.	
17°X17°	24"	43 1/2"	22 1/2*	60 lb.	
17°X23°	18"	37 1/2*	28 1/2°	70 lb.	
17°X23°	24"	43 1/2"	28 1/2"	75 lb.	
23"X23"	24°	49 1/2"	28 1/2*	80 lb.	
23"X23"	30°	55 1/2°	28 1/2"	85 lb	
	17"X17" 17"X17" 17"X23" 17"X23" 23"X23"	17"X17" 18" 17"X17" 24" 17"X23" 18" 17"X23" 24" 23"X23" 24"	17"X17" 18" 37 1/2" 17"X17" 24" 43 1/2" 17"X23" 18" 37 1/2" 17"X23" 24" 43 1/2" 23"X23" 24" 49 1/2"	17"X17" 18" 37 1/2" 22 1/2" 17"X17" 24" 43 1/2" 22 1/2" 17"X23" 18" 37 1/2" 28 1/2" 21"X23" 24" 43 1/2" 28 1/2" 23"X23" 24" 49 1/2" 28 1/2" 28 1/2"	



	1.D.	Size	L	W	Weight
1NSF17-2D18	17°X17°	18°	53"	22 1/2"	75 lb.
1NSF17-2D24	17°X17°	24°	65"	22 1/2"	80 lb.
1NSF1723-2D18	17"X23"	18"	53"	28 1/2"	90 lb.
1NSF1723-2024	17"X23"	24°	65°	28 1/2"	95 lb.
1NSF23-2D24	23"X23"	24°	71*	28 1/2*	110 lb.
1NSF23-2D30	23"X23"	30°	83*	28 1/2"	115 lb.



Model	Tub Size	Drainboard	Dimer	Shipping	
	I.D.	Size	L	W	Weight
2NSF17-()*D18	17°X17°	18"	56 1/2°	22 1/2"	80 lb.
2NSF17-()*D24	17°X17°	24"	62 1/2"	22 1/2"	85 lb.
2NSF1723-()*D18	17"X23"	18"	56 1/2"	28 1/2"	95 lb.
2NSF1723-()*D24	17"X23"	24"	62 1/2°	28 1/2"	100 lb.
2NSF23-()*24	23°X23°	24"	74 1/2"	28 1/2"	110 lb.
2NSF23-()*30	23"X23"	30"	80 1/2"	28 1/2*	115 lb.



	I.D.	Size	L	W	Weight	
2NSF17-2D18	17"X17"	18"	72°	22 1/2"	100 lb.	
2NSF17-2D24	17"X17"	24"	84"	22 1/2°	105 lb.	
2NSF1723-2D18	17"X23"	18"	72°	28 1/2*	120 lb.	
2NSF1723-2D24	17"X23"	24"	84°	28 1/2°	130 lb.	
2NSF23-2D24	23"X23"	24"	96"	28 1/2"	145 lb.	
2NSF23-2D30	23°X23°	30"	108"	28 1/2"	155 lb.	


WITH	RIGHT	r Dr#	IN B	OARD
		N.		
			-17	
No.			1	

Model	Tub Size	Drainboard	Dimer	Shipping	
	I.D.	Size	L	W	Weight
3NSF17-()*D18	17°X17°	18"	75 1/2*	22 1/2*	110 lb.
3NSF17-()*D24	17°X17°	24°	81 1/2*	22 1/2*	115 lb.
3NSF1723-()*D18	17"X23"	18"	75 1/2°	28 1/2*	125 lb.
3NSF1723-()*D24	17°X23°	24"	81 1/2"	28 1/2*	130 lb.
3NSF23-()*D24	23°X23°	24"	99 1/2"	28 1/2*	150 lb.
3NSF23-()*D30	23°X23°	30"	105 1/2"	28 1/2*	155 lb.



Dimensions	Shipping
W	Weight
1" 22 1/2	2" 120 lb.
3" 22 1/2	2" 130 lb.
1" 28 1/2	2° 150 lb.
3" 28 1/2	2* 160 lb.
1" 28 1/2	2* 170 lb.
3" 28 1/2	2° 180 lb.
K	13" 28 1/2

FLOOR MOUNTED SINKS



The backsplash will be 6" high with a 1" return to the wall at 45° and a 1" horizontal. Tub is furnished with a 1 3/8" center drain opening. Supplied with a stainless steel pedestal for floor installation.

Model	Tub Size	Dime	nsions	Shipping	
		L	W	Weight	
FLHS1212	12"X12"	14"	16"	25 lb.	
FLHS1216	12"X16"	14"	20"	27 lb.	
FLHS1612	16"X12"	18"	16"	29 lb.	
FLHS1616	16"X16"	18"	20"	35 lb.	


STANDARD FEATURES:

- · 16 gauge Type 304 stainless steel with a #4 polish
- · Right side 2" turn down
- · Left side 2" turn down

OPTIONAL FEATURES:

- · 14 gauge Type 304 stainless steel with a #4 polish
- · Right end splash to match backsplash
- · Left end splash to match backsplash
- Sound deadner
- · Soap dispenser
- Towel dispenser
- · Foot operated valves

WALL MOUNTED SINKS



The backsplash will be 6" high with a 1" return to the wall at 45° and a 1" horizontal. Tub is furnished with a 1 3/8" center drain opening. Supplied with a Z-bracket for wall installation.

Model Dimensions Shippin Weight WAHS1212 14" 16" 20 lb WAHS1216 12"X16" 14" 20" 22 lb WAHS1612 16"X12" 18" 16" 24 lb. WAHS1616 16"X16" 18* 20" 30 lb.


STANDARD FEATURES:

- · 16 gauge Type 304 stainless steel with a #4 polish
- · Right side 2" turn down
- · Left side 2" turn down

OPTIONAL FEATURES:

- · 14 gauge Type 304 stainless steel with a #4 polish
- · Right end splash to match backsplash
- · Left end splash to match backsplash
- · Sound deadner
- · Soap dispenser
- Towel dispenser
- · Knee operated valves

CHEMICAL SINKS

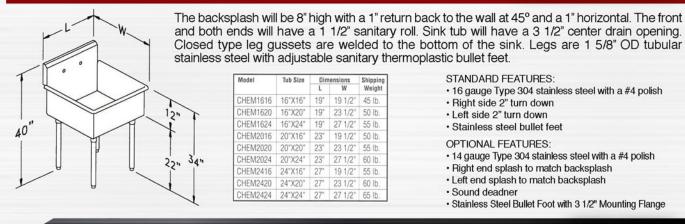

Model	Tub Size	Dimensions		Shipping	
		L	W	Weight	
CHEM1616	16"X16"	19"	19 1/2"	45 lb.	
CHEM1620	16"X20"	19"	23 1/2"	50 lb.	
CHEM1624	16"X24"	19*	27 1/2"	55 lb.	
CHEM2016	20"X16"	23"	19 1/2*	50 lb.	
CHEM2020	20"X20"	23"	23 1/2"	55 lb.	
CHEM2024	20"X24"	23°	27 1/2"	60 lb.	
CHEM2416	24"X16"	27"	19 1/2"	55 lb.	
CHEM2420	24"X20"	27"	23 1/2"	60 lb.	
CHFM2424	24"X24"	27"	27 1/2"	65 lh	


STANDARD FEATURES:

- · 16 gauge Type 304 stainless steel with a #4 polish
- · Right side 2" turn down
- · Left side 2" turn down
- · Stainless steel bullet feet

OPTIONAL FEATURES:

- 14 gauge Type 304 stainless steel with a #4 polish
- · Right end splash to match backsplash
- · Left end splash to match backsplash
- Sound deadner
- · Stainless Steel Bullet Foot with 3 1/2" Mounting Flange

MOP SINKS

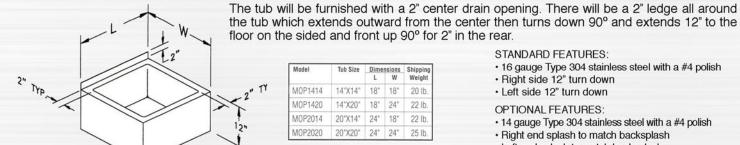

Model	Tub Size	Dime	nsions	Shipping
		L	W	Weight
M0P1414	14"X14"	18"	18"	20 lb.
M0P1420	14"X20"	18"	24"	22 lb.
M0P2014	20"X14"	24"	18"	22 lb.
M0P2020	20"X20"	24*	24"	25 lb.

STANDARD FEATURES:

- · 16 gauge Type 304 stainless steel with a #4 polish
- · Right side 12" turn down
- · Left side 12" turn down


OPTIONAL FEATURES:

- 14 gauge Type 304 stainless steel with a #4 polish
- · Right end splash to match backsplash
- · Left end splash to match backsplash
- · Sound deadner

ACCESSORIES

SINGLE RACK SHELF

DOUBLE RACK SHELF




	DIMENSIONS		
MODEL NUMBER	L	W	
SRS-2121	21"	21"	
SRS-4221	42"	21"	
SRS-6321	63"	21"	




	DIMENSIONS		
MODEL NUMBER	L	W	
DRS-36	36"	25"	
DRS-48	48"	25"	
DRS-60	60"	25"	
DRS-72	72"	25"	
DRS-84	84"	25"	

SINK COVER

RACK SLIDE




	TUB SIZE		
MODEL NUMBER	L	W	
SC-1818	18"	18"	
SC-1824	18"	24"	
SC-2020	20"	20"	
SC-2424	24"	24"	




	TUB SIZE		
MODEL NUMBER	L	W	
RS-18	18"	18"	
RS-20	20"	20"	
RS-24	24"	24"	

SCRAP BASKET

FALSE BOTTOM





	TUB	SIZE
MODEL NUMBER	L	W
SSB-1818	18"	18"
SSB-1824	18"	24"
SSB-2020	20"	20"
SSB-2424	24"	24"





	TUB SIZE		
MODEL NUMBER	L	W	
FB-1818	18"	18"	
FB-1824	18"	24"	
FB-2020	20"	20"	
FB-2424	24"	24"	

FABRICATED EDGES AND NOSINGS









STREIVOR AIR SYSTEMST

1742 SABRE STREET | (510) 670-9090 HAYWARD, CA 94545 | FAX: (510) 670-9055 WWW.STREIVOR.COM