


CKV LED Recessed Hood Lighting Fixture

Model: **CKV-RC-LED-F**

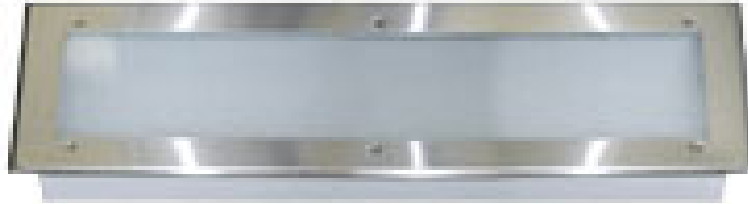

Energy-saving LED Recessed light for Commercial Kitchen Hood applications maximize light output at a fraction of the wattage consumed by standard incandescent and fluorescent lights. LED lamp is available in either Warm or Natural color temperatures.

FEATURES AND BENEFITS

LED recessed light fixture for CKV hood

- Temperature rated to 70°C (167°F)
- Only 4.5" (114mm) high...for limited overhead clearance applications
- Lamps contain no mercury or other hazardous materials
- Contributes to LEED® energy use reduction credits
- 50,000 hour lamp life
- Instant on; no ballast to warm up
- Tempered, prismatic glass diffuser
- One piece satin finished stainless steel face frame
- Meets requirements for NFPA 96 and N.E.C. 410

SPECIFICATIONS

"A" Dimension	24.5" / 36.5" / 48.5"
Bulb Type	T8-LED
Natural Color Temp.	4500K - 5500K
Warm Color Temp.	2700K - 3500K
Cut-Out Length	24.5" / 36.5" / 48.5"
Cut-Out Width	8.5" / 8.5" / 8.5"
Holes Required	12 / 14 / 14
Total Lumens Output	1800 / 2500 / 3800
Voltage	120 VAC
Wattage	22 / 26 / 44

Overall Trim Size	"A" Cut Out	"B" Holes	"C" Spacing	"D" Each Side
10.25" x 26.25" (260mm x 667mm)	24.5" (622mm)	12 total	6" (152mm)	3 Plcs
10.25" x 38.25" (260mm x 972mm)	36.5" (927mm)	14 total	7.5" (191mm)	4 Plcs
10.25" x 50.25" (260mm x 61276mm)	48.5" (1232mm)	14 total	10.5" (267mm)	4 Plcs


Dimensions are for reference only and are subject to change.

Approx. shipping weight – 10 lbs.



CKV LED Recessed Hood Lighting Fixture

Model: **CKV-RC-LED-F**

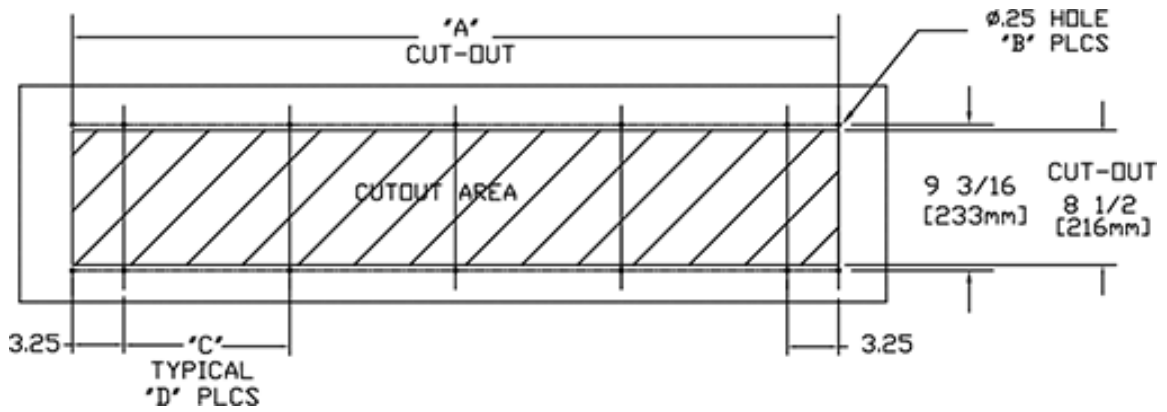

Beam Angle

Mounting Height In Feet

